


500 NM STANDARD ARM COVERAGE

STANDARD ARM COVERAGE IS SYMMETRIC ABOUT THE OUTSIDE RADIUS

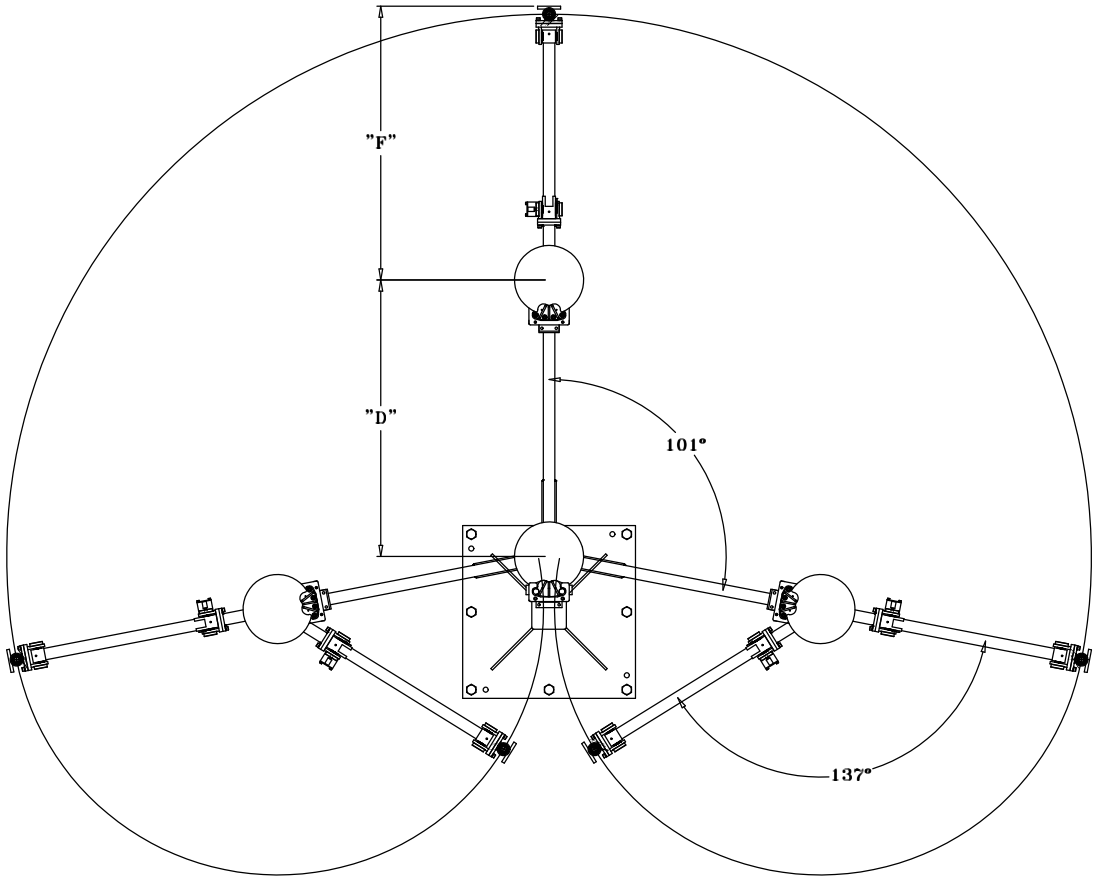

BASIC ARTICULATING ARM							
MODEL	CYLINDER	MAX. TORQUE NM	BALANCE CAP. @ 80psi	TUBE LENGTH	VERTICAL TRAVEL	REACH DIM. RANGE	
						"D"	"F"
20	3.25	500	198#	24"	18.00"	36"	41.50"
		500	158#	30"	22.50"	48"	47.50"
		500	132#	36"	27.00"	60"	53.50"
		500	113#	42"	31.50"		59.50"
		500	113#	48"	36.00"		65.50"
	4.00	500	313#	24"	18.00"	36"	41.50"
		500	250#	30"	22.50"	48"	47.50"
		500	209#	36"	27.00"	60"	53.50"
		500	178#	42"	31.50"		59.50"
		500	156#	48"	36.00"		65.50"
	5.00	500	500#	24"	18.00"	36"	41.50"
		500	400#	30"	22.50"	48"	47.50"
		500	334#	36"	27.00"	60"	53.50"
		500	286#	42"	31.50"		59.50"
		500	245#	48"	36.00"		65.50"