


500 NM STANDARD ARM COVERAGE

STANDARD ARM COVERAGE IS SYMMETRIC ABOUT THE OUTSIDE RADIUS

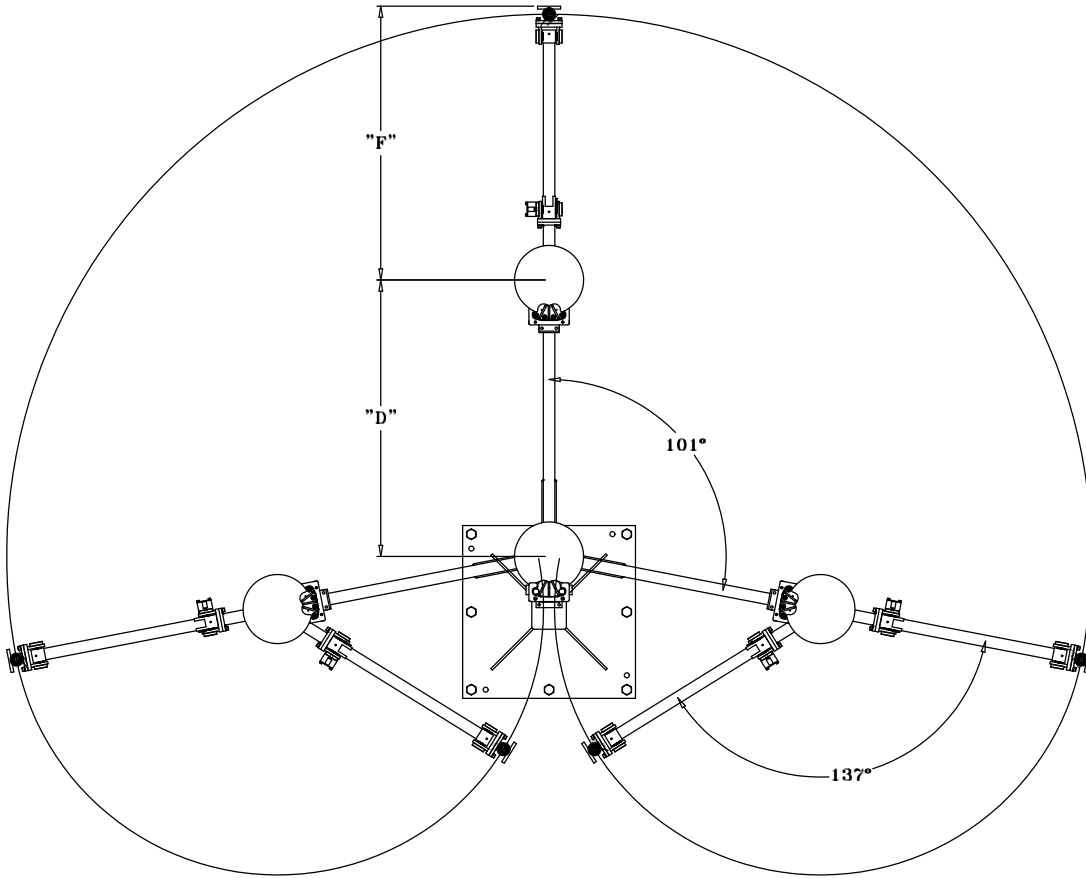

| BASIC ARTICULATING ARM | | | | | | | |
|------------------------|----------|-------------------|-------------------------|----------------|--------------------|------------------|--------|
| MODEL | CYLINDER | MAX. TORQUE NM | BALANCE CAP. @ 80psi | TUBE LENGTH | VERTICAL TRAVEL | REACH DIM. RANGE | |
| | | | | | | "D" | "F" |
| 20 | 3.25 | 500 | 198# | 24" | 18.00" | 36" | 41.50" |
| | | 500 | 158# | 30" | 22.50" | 48" | 47.50" |
| | | 500 | 132# | 36" | 27.00" | 60" | 53.50" |
| | | 500 | 113# | 42" | 31.50" | | 59.50" |
| | | 500 | 113# | 48" | 36.00" | | 65.50" |
| | 4.00 | 500 | 313# | 24" | 18.00" | 36" | 41.50" |
| | | 500 | 250# | 30" | 22.50" | 48" | 47.50" |
| | | 500 | 209# | 36" | 27.00" | 60" | 53.50" |
| | | 500 | 178# | 42" | 31.50" | | 59.50" |
| | | 500 | 156# | 48" | 36.00" | | 65.50" |
| | 5.00 | 500 | 500# | 24" | 18.00" | 36" | 41.50" |
| | | 500 | 400# | 30" | 22.50" | 48" | 47.50" |
| | | 500 | 334# | 36" | 27.00" | 60" | 53.50" |
| | | 500 | 286# | 42" | 31.50" | | 59.50" |
| | | 500 | 245# | 48" | 36.00" | | 65.50" |