



500 NM STANDARD ARM COVERAGE

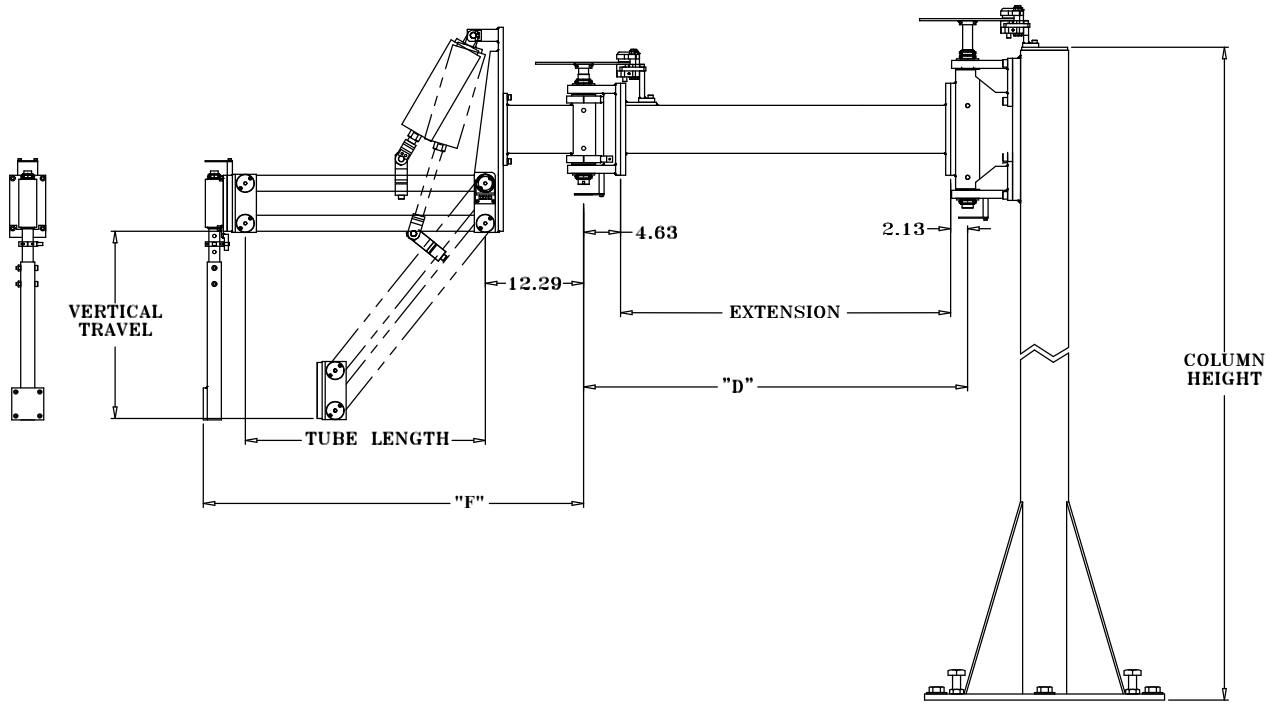

| BASIC ARTICULATING ARM | | | | | | | | | | OPTIONS | | | |
|------------------------|----------|------|-----------|--------|-------------|-----|-----------------|------------------|--------|-------------|-----------|---------------|-------------|
| MODEL | CYLINDER | | EXTENSION | | TUBE LENGTH | | VERTICAL TRAVEL | REACH DIM. RANGE | | PIVOT BRAKE | | COLUMN HEIGHT | |
| | | | | | | | | "D" | "F" | | | | |
| 20 | 1 | 3.25 | 1 | 29.25" | 1 | 24" | 18.00" | 36" | 41.50" | 1 | W/O BRAKE | 1 | 8' - 96.00" |
| | 2 | 4.00 | 2 | 41.25" | 2 | 30" | 22.50" | 48" | 47.50" | 2 | W/ BRAKE | 2 | 9' - 108" |
| | 3 | 5.00 | 3 | 53.25" | 3 | 36" | 27.00" | 60" | 53.50" | | | 3 | 10' - 120" |
| | | | | | 4 | 48" | 31.50" | | 59.50" | | | 4 | 11' - 132" |
| | | | | | | | | | | | | 5 | 12' - 144" |

(EXAMPLE PART # 201-1221)

BREAKDOWN OF EXAMPLE PART # 20 1 - 1 2 2 1

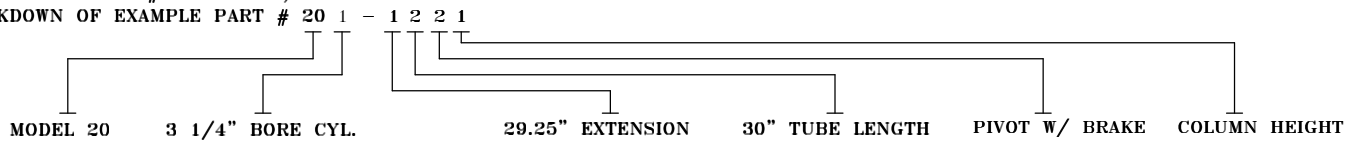

NOTES: 1) NONE.

2) NONE.